# Thermostatic Mixer Valve & Diverter - 2 Outlet

| | |
|---|---|
| **CODE** | MLSH2OTMVD |
| **CONSTRUCTION** | Brass Body (CuZn38b18) |
| **FINISHES** | Brass |
| **PRODUCT TYPE** | Contemporary |
| **WATER PRESSURE** | Min. 1.0 bar, Max. 6.0 bar |
| **PLUMBING SYSTEMS** | Suitable for all plumbing systems, preferably balanced. Min. supply pressure differential requirement is 5:1 |
| **STANDARDS** | Complies with BSEN 1111 |
| **CARTRIDGE** | Vernet Thermostatic Cartridge |
| **DIVERTER** | Citec Diverter |
| **ADDITIONAL INFO** | 1. Temperature: Pre-set 38°C, with push button override to 48°C<br>2. Automatic shut off in the event of hot or cold water supply failure |

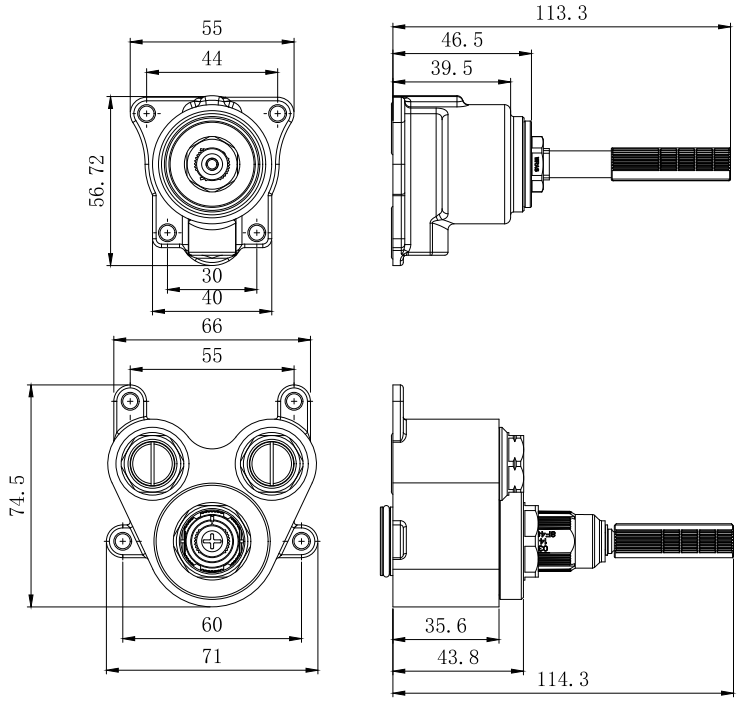

**Flow Rates** (Litres per minute)

| SYSTEM PRESSURE | 0.1 Bar | 0.2 Bar | 0.3 Bar | 0.5 Bar | 1.0 Bar | 1.5 Bar | 2.0 Bar | 3.0 Bar | 4.0 Bar | 5.0 Bar |
|---|---|---|---|---|---|---|---|---|---|---|
| | 4.5 | 5.9 | 7.0 | 8.9 | 12.4 | - | 17.3 | 21.4 | 24.8 | 27.8 |

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.