AFTER CARE INSTRUCTIONS

- Excessive exposure to water will deteriorate the furniture. Wipe away any water splashes or condensation after use.
- All bathrooms should be well ventilated, if needed, with a suitable extractor fan.
- Clean with a soft damp cloth only.
- For removal of lime scale deposits use a suitable non abrasive cleaner.

AFTER SALES & TECHNICAL SUPPORT

Our highly experienced after sales and technical support team are always on hand to help should you require technical advise or a spare part.

T: +44 (0)28 3025 9988

E: technical@mylifebathrooms.com

www.mylifebathrooms.com

MYLIFE

Bonita I Madison I Hampton

WALL HUNG UNIT
INSTALLATION INSTRUCTIONS



Bonita



Madison



Hampton

Greenbank Industrial Estate, Newry, Co. Down BT34 2QU
Tel: +44 28 3025 6392 E-mail: sales@mylifebathrooms.com

INSTALLATION INSTRUCTIONS

1. Unit should be installed by a qualified professional.

2. Mark the location of both mounting plates ensuring that they are positioned slightly inside the side-walls of the unit. The recommended height for the unit including basin is 850mm.

3. For solid wall application - each mounting plate drill two holes in the marked positions using a 8mm drill bit to a depth of 55mm. For stud wall application installer should supply relevant fixings and ensure adequate grounds are within the stud wall to support the weight of the unit.

4. Locate the hangers onto the wall mounting plates. Screw A tightens the unit against the wall and screw B adjusts the height of the unit.

5. Once the wall mounted unit has been secured to the wall, use a silicone sealant to permanently seal the basin to the unit.

6. To remove the drawer from the unit, fully extend the drawer. On the underneath of either side of the drawer are two plastic clips that can be pushed inwards to release the drawer from the runners. When replacing the drawer, ensure that the drawer clicks into position with the runners on both sides of the drawer.

7. The height of the front panel can be adjusted by turning the wheel located at the sides of the drawer, which can be accessed by removing the cover cap. Turning it forward will move the front panel up and turning it backward will move the front panel down. The front panel can also be removed by pushing buttons located at both sides of the drawer box.

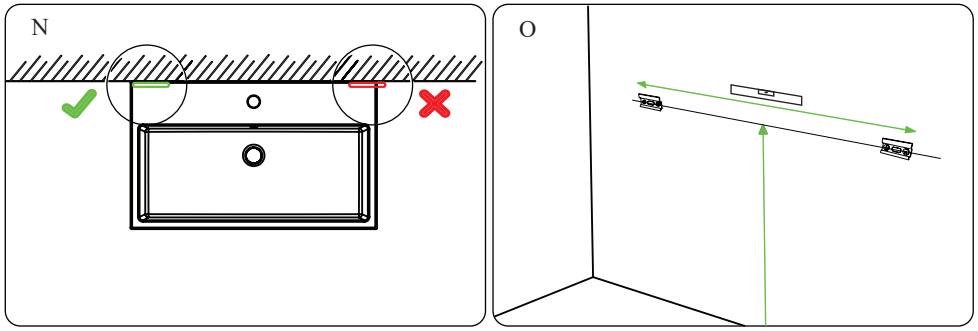

Unit Mounting - Make sure to use a spirit level

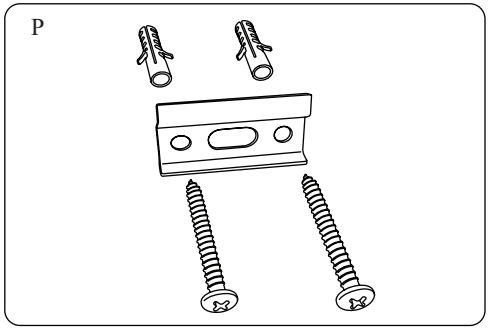

Fittings

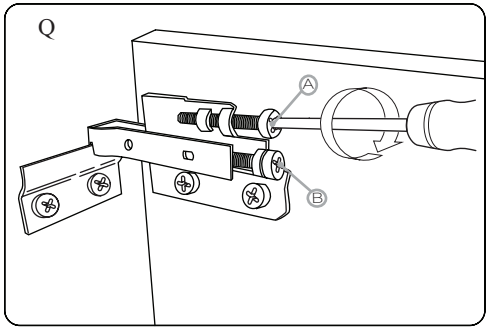

Unit Adjustment

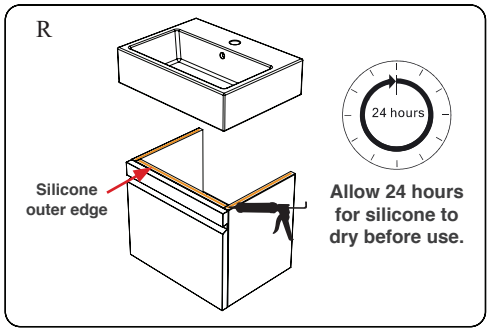

Unit Sealing

Note silicone outer edge of the basin to the unit only. So the basin can be changed if it ever needs replaced.

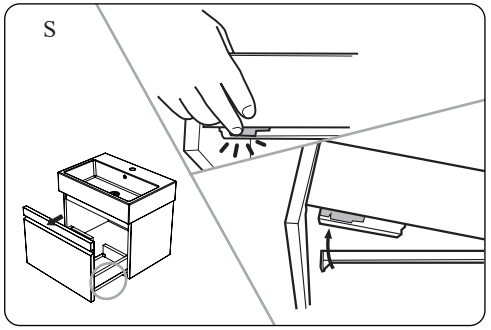

Drawer Removal

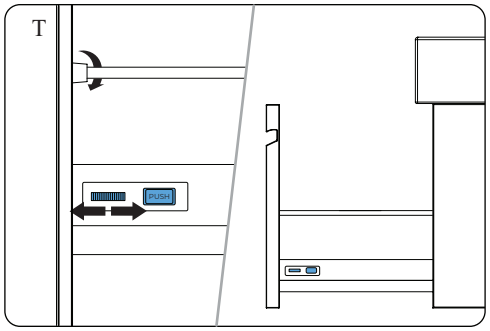

Drawer Adjustment