


Solution 1135 Wall Hung Frame Installation Manual

THIS PRODUCT MUST BE INSTALLED
BY A PROFESSIONAL PLUMBER




PRE-INSTALLATION CHECKS

- Check that the cistern is compatible with your current requirements, see product dimensions on the next page.
- Please check the cistern for any issues before installation.
- NOTE: The wall plugs supplied are only suitable for solid stone / brick walls. For plasterboard use specialist wall plugs available from any DIY or hardware store.
- Check for any hidden pipes and cables, electric or otherwise before drilling holes in a wall.
- When installing this unit in an enclosed space, ensure sufficient access is provided for future servicing and maintenance. The manufacturer will not be responsible for any costs incurred due to restricted or inadequate access.

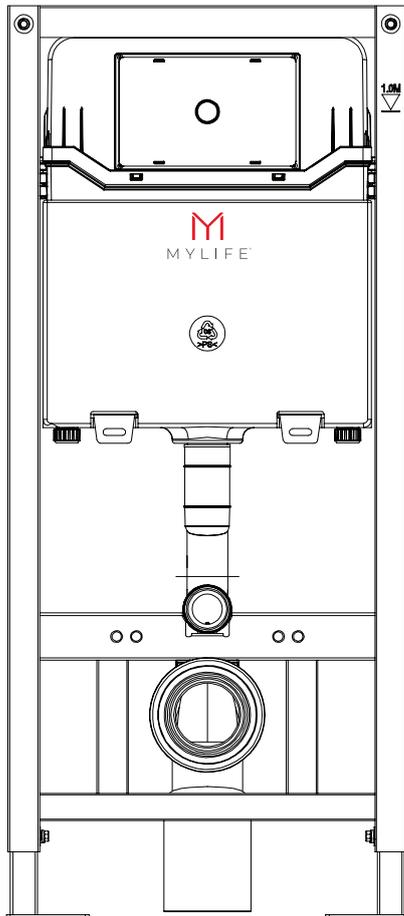

TOOLS REQUIRED



Drill & 10mm Bit



Spirit Level




Tape Measure




Wrench 13mm



Pencil



Screwdriver



Hacksaw



File



Hex Key



SCAN HERE
For Installation
& Maintenance
Instructions

AFTER SALES & TECHNICAL SUPPORT

Our highly experienced after sales and technical support team are always on hand to help should you require technical advice or a spare part.

T: +44 (0)28 3025 9988


E: technical@mylifebathrooms.com

Solution 1135 Wall Hung Frame Installation Manual





MYLIFE®

PRODUCT DIMENSIONS

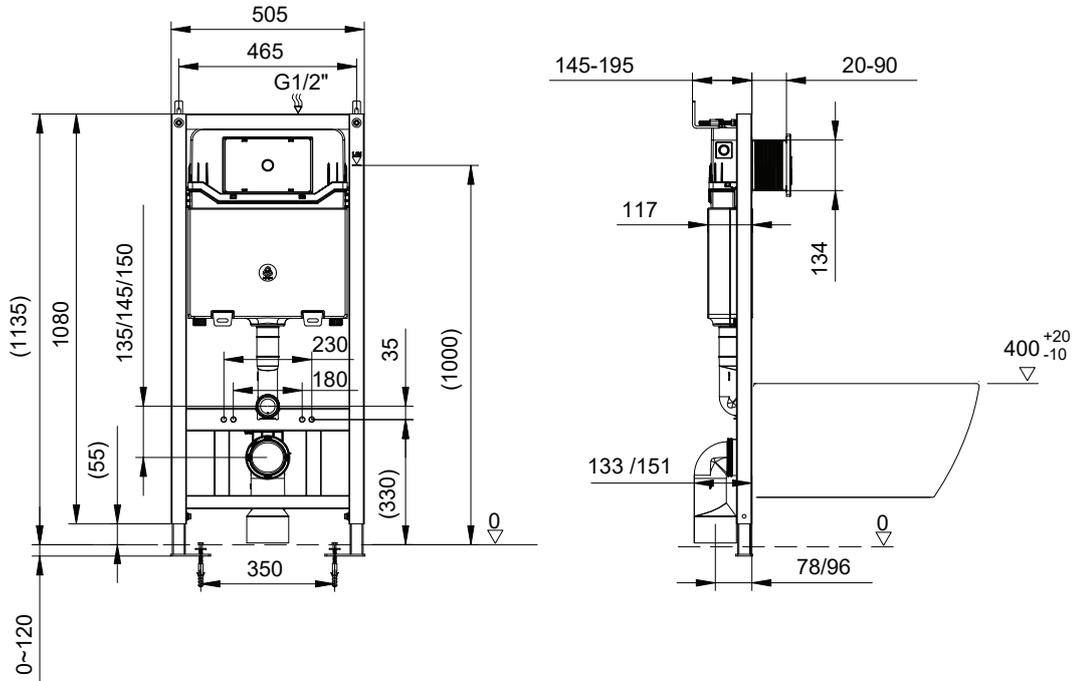

PACKAGE CONTENTS

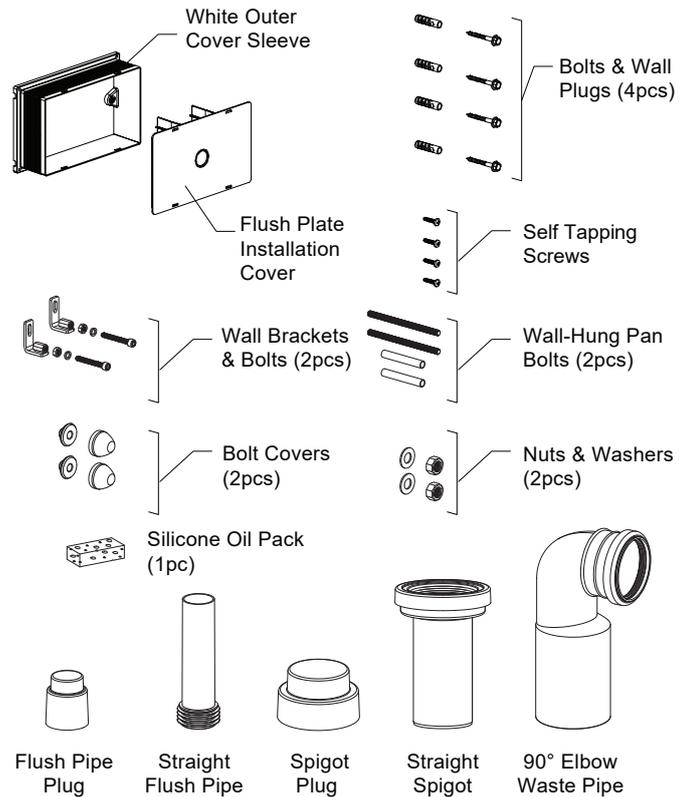
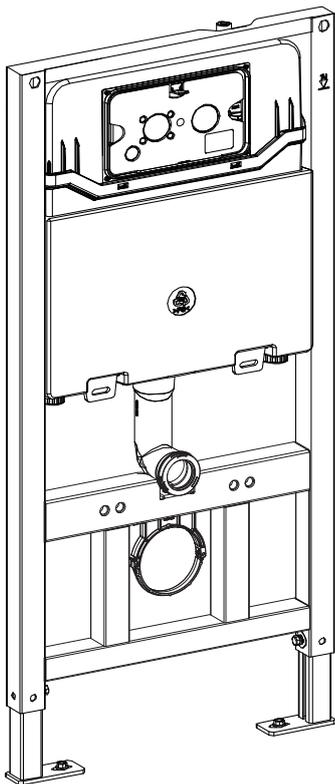


Solution 1135 Wall Hung Frame Installation Manual



MYLIFE®

INSTALLATION OF CISTERN

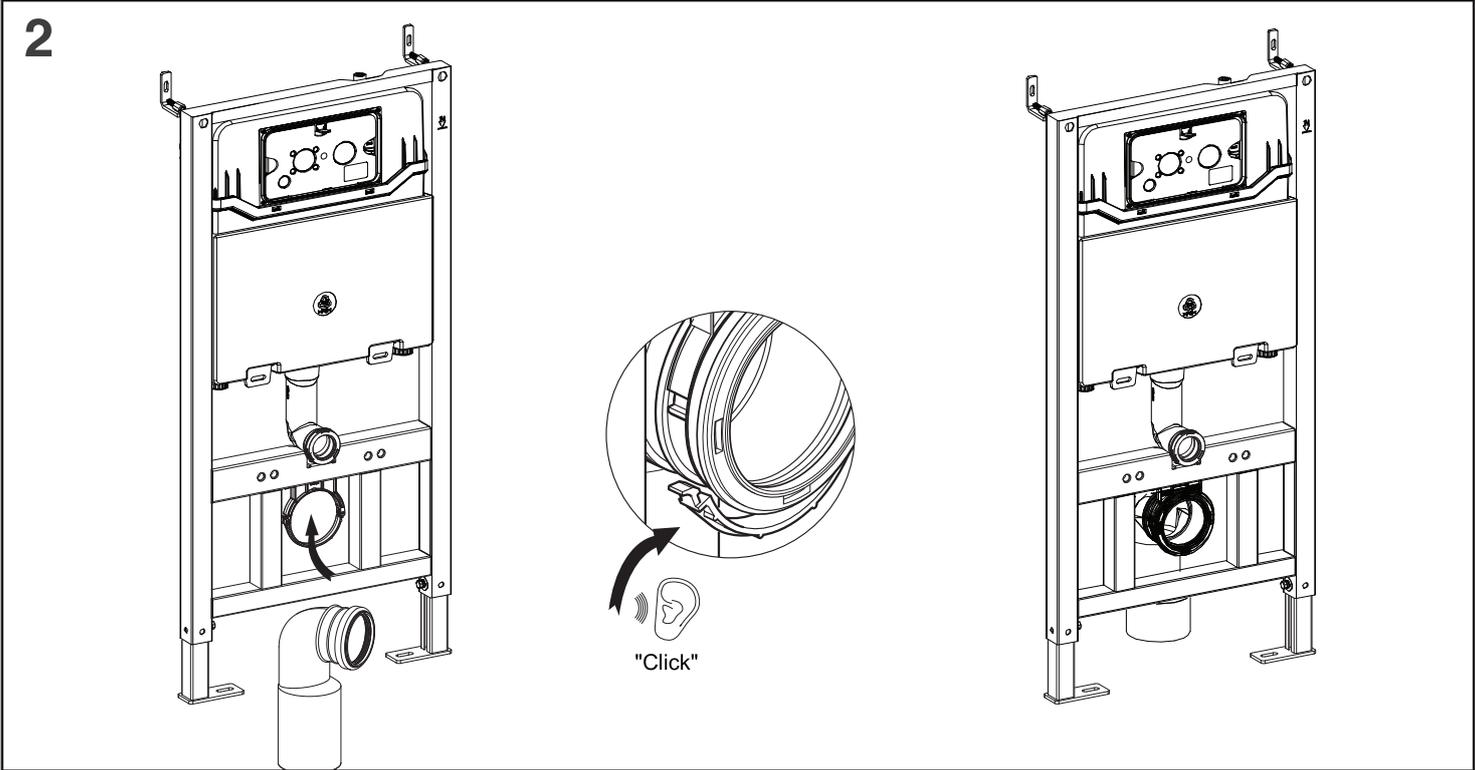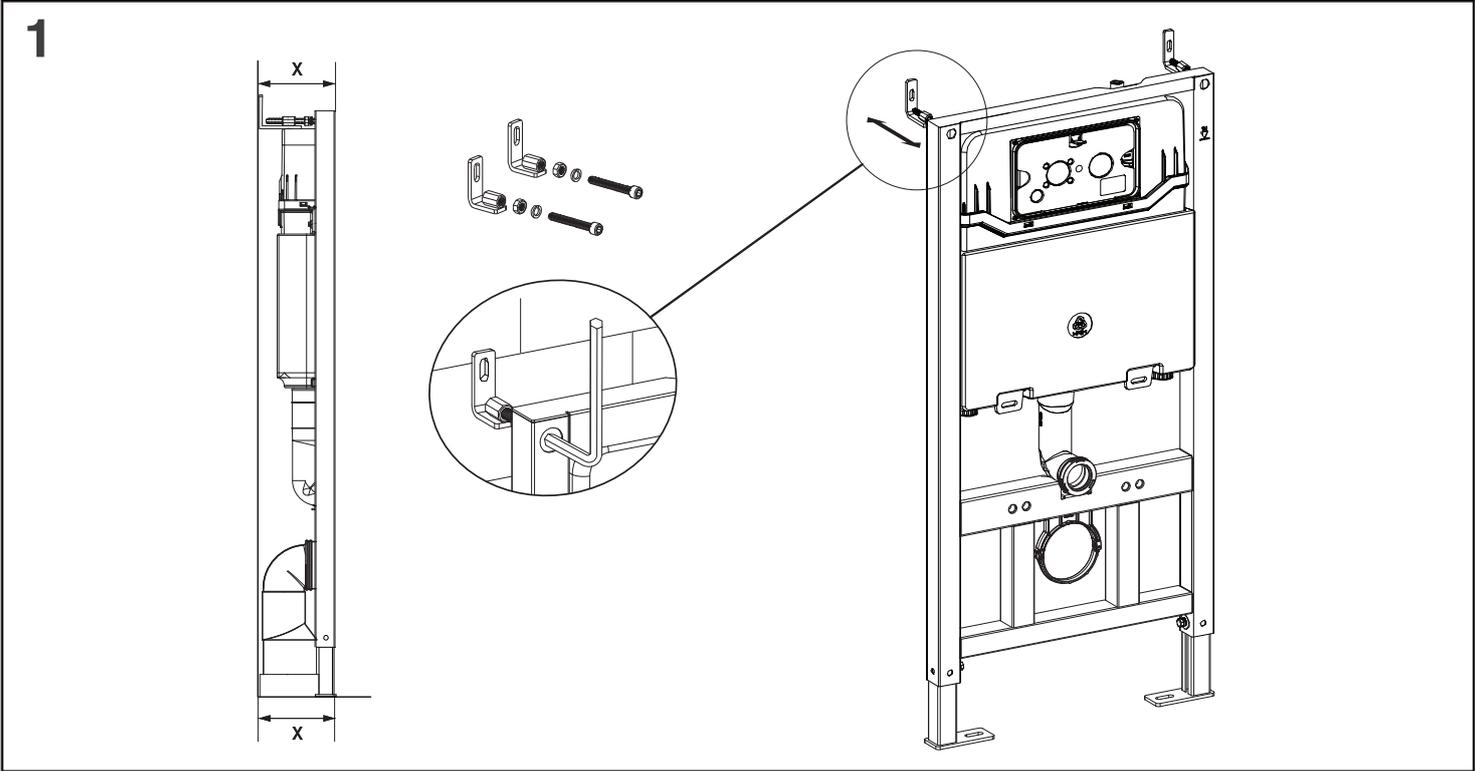


Solution 1135 Wall Hung Frame Installation Manual




MYLIFE®

INSTALLATION OF CISTERN

3

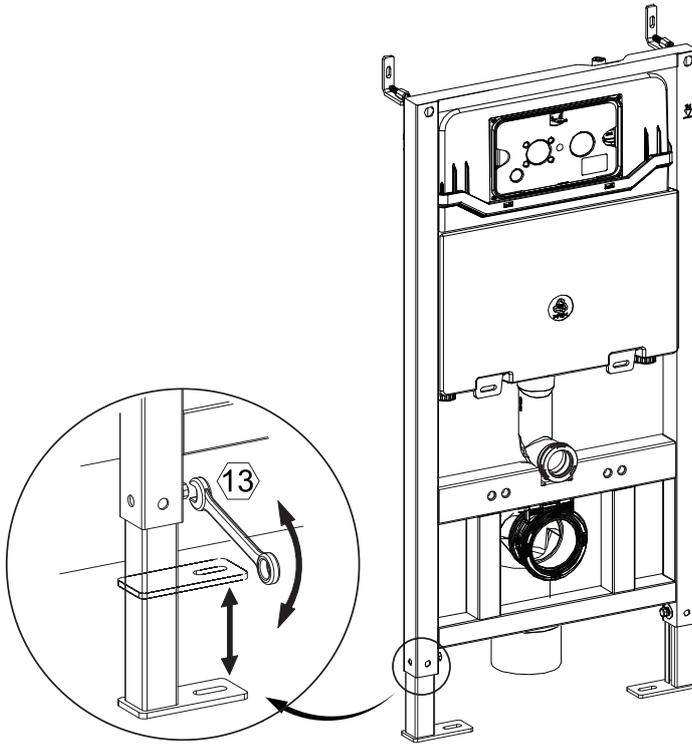

4

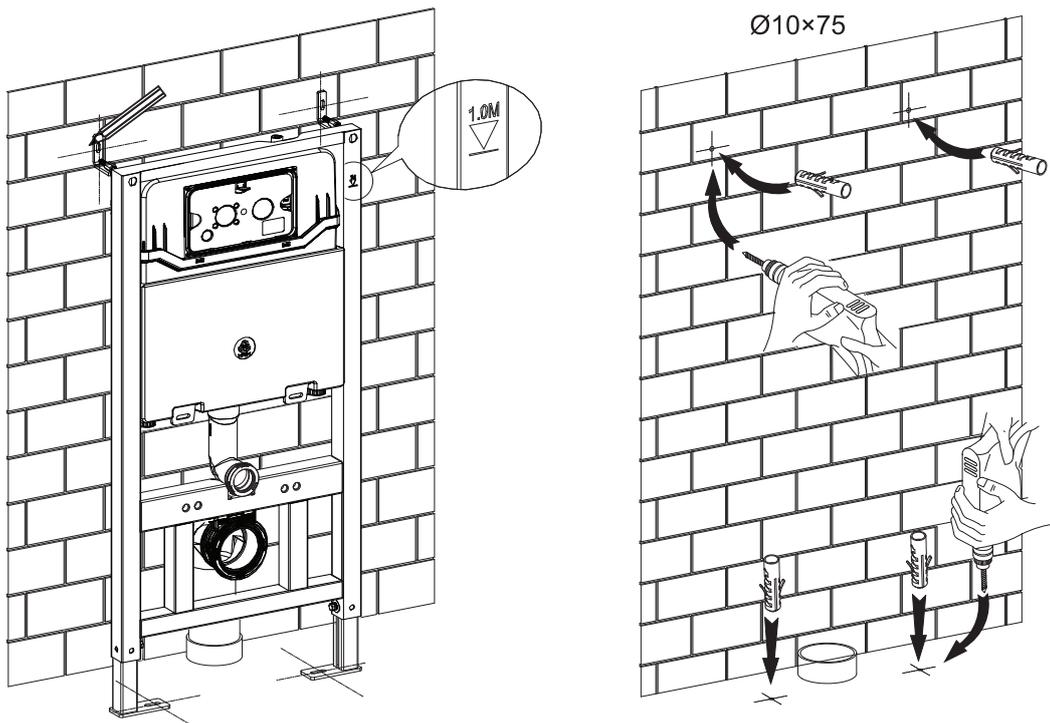


Solution 1135 Wall Hung Frame Installation Manual




MYLIFE®

INSTALLATION OF CISTERN


5

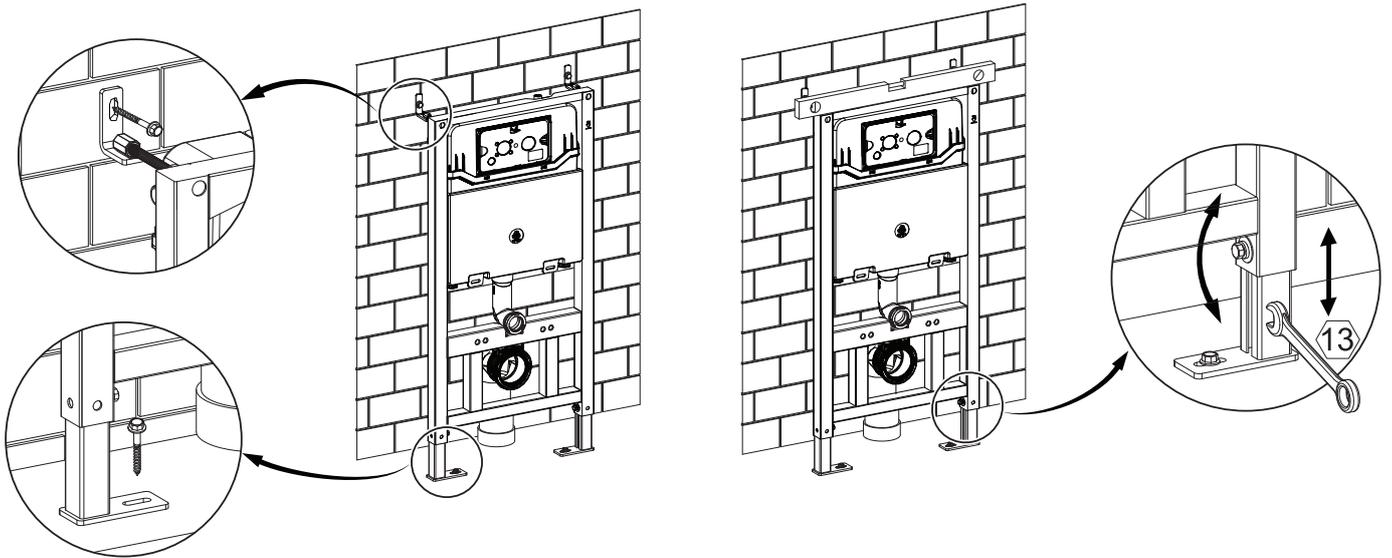

6

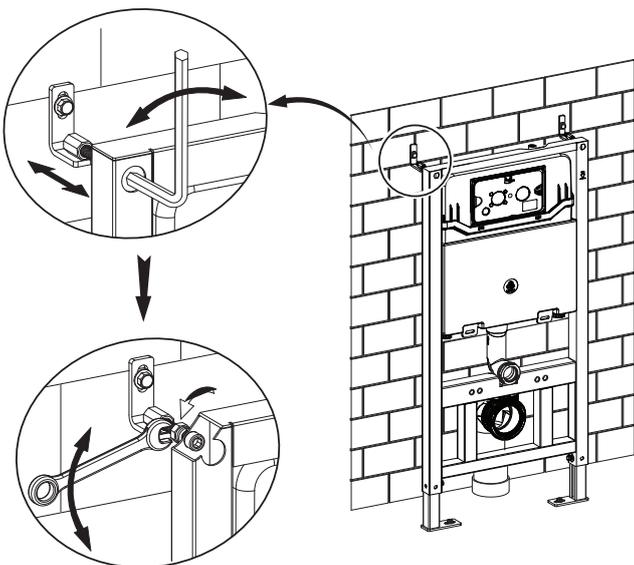

7


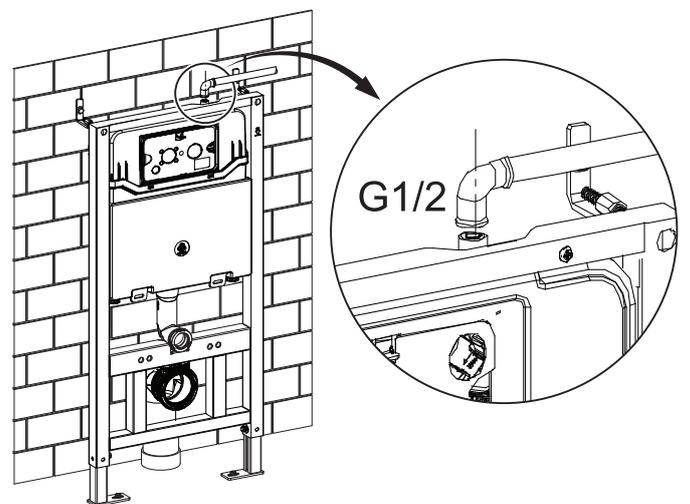


Solution 1135 Wall Hung Frame Installation Manual



MYLIFE®

INSTALLATION OF CISTERN

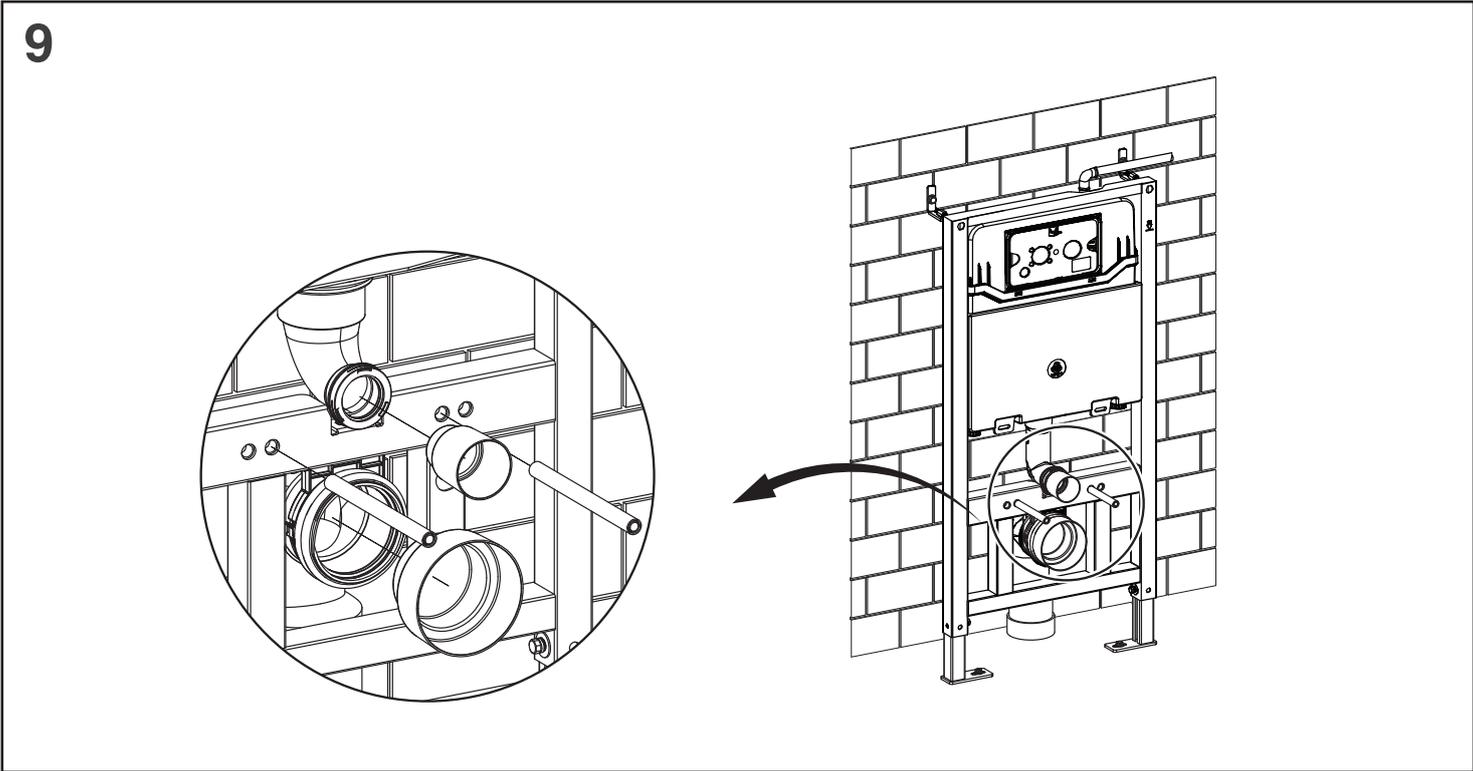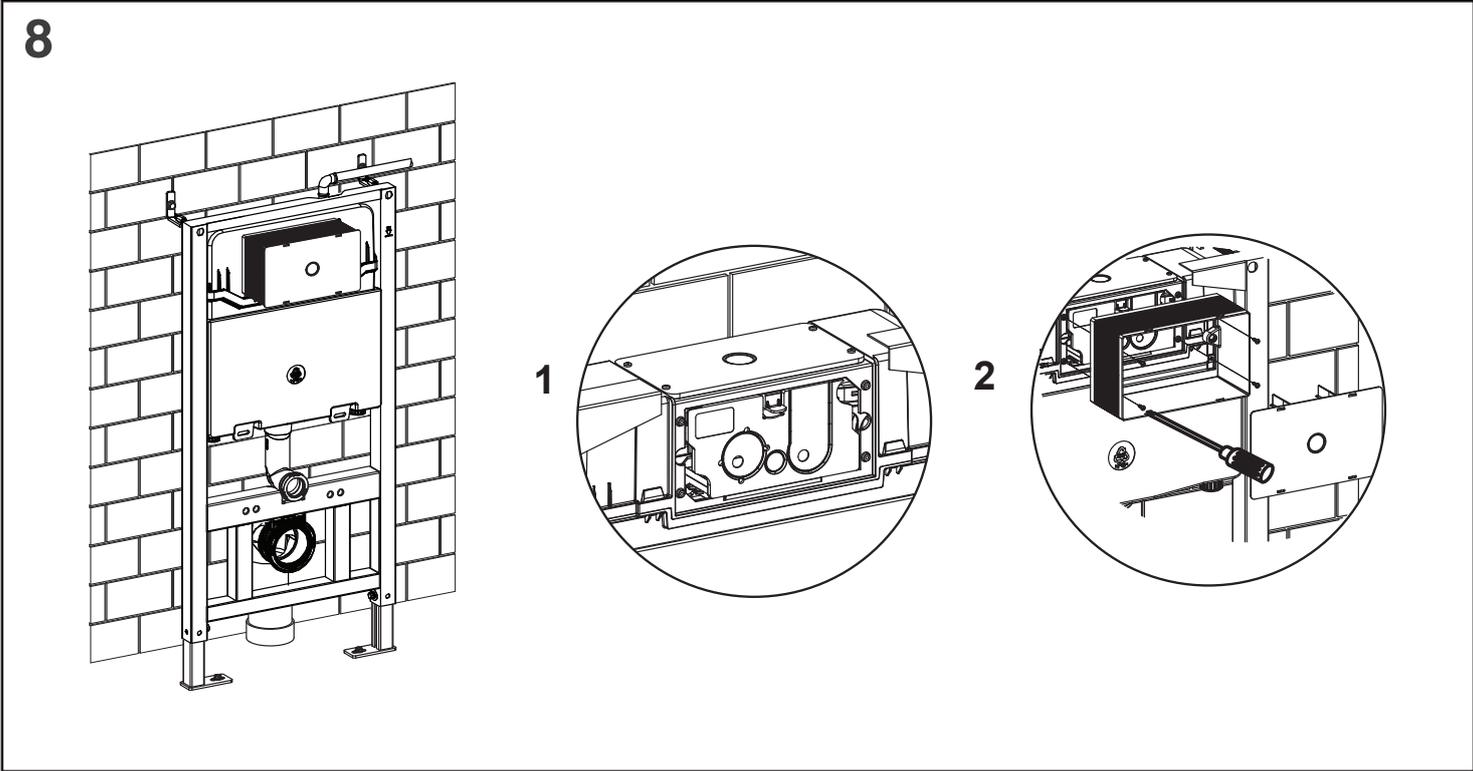


Solution 1135 Wall Hung Frame Installation Manual




MYLIFE®

INSTALLATION OF CISTERN

10

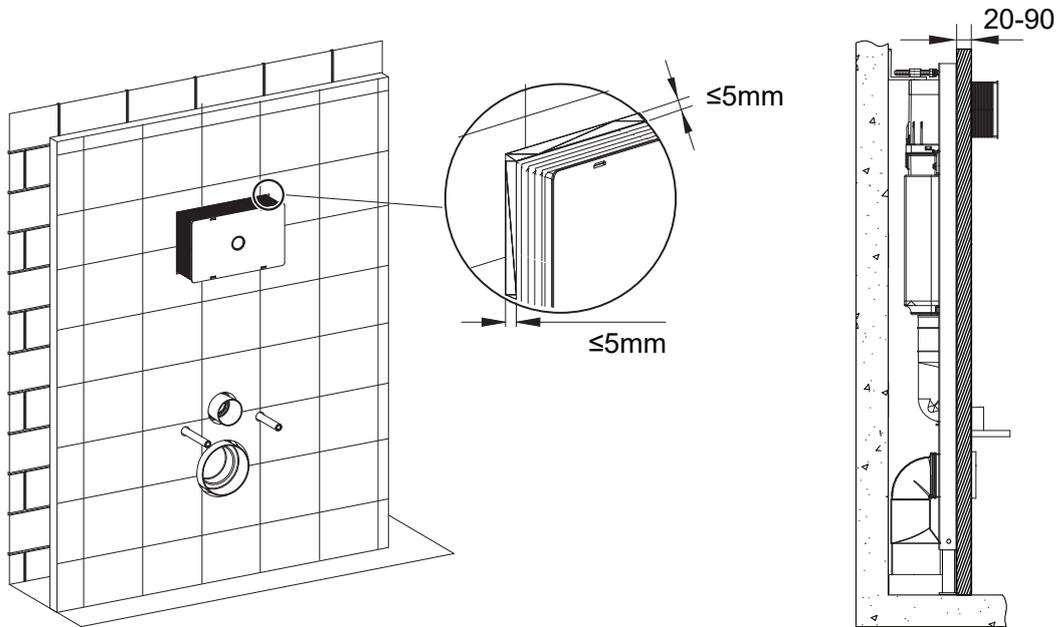

INSTALLATION OF THE TOILET

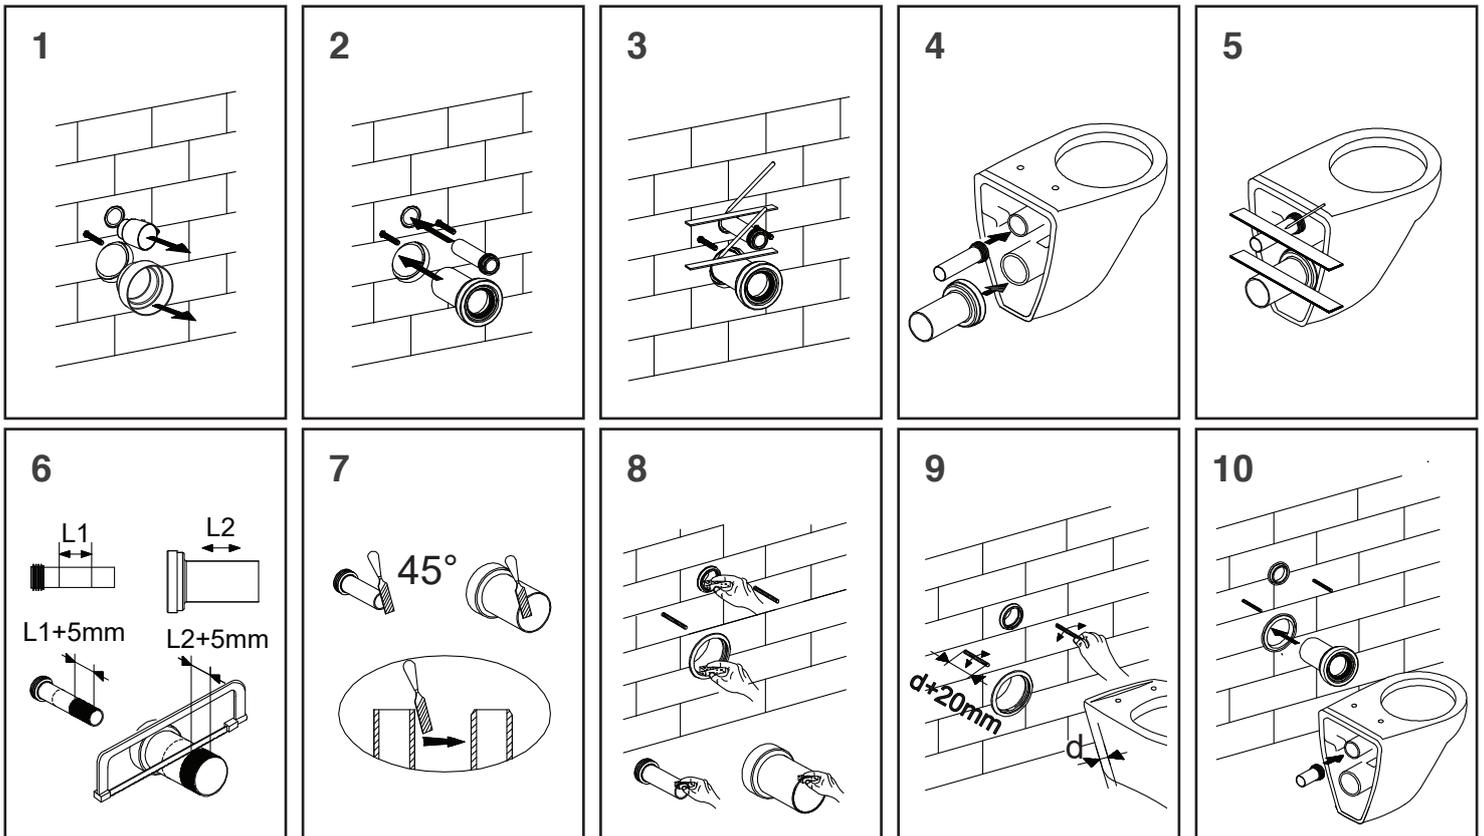

Solution 1135 Wall Hung Frame Installation Manual



ADJUSTMENTS & MAINTENANCE



Flush Volume, factory setting is 5.8 and 3.8l

For Adjustments & Maintenance Instructions- Scan the QR Code or Visit our Website <https://mylifebathrooms.com/how-to-videos/solution-wall-hung-frames-cisterns/>

CARE INSTRUCTIONS

- Do not put any caustic chemical substances (e.g. containing chlorine compounds or similar) into the cistern as they can damage the valve components and cause it to stop working / leaks.
- Before starting to enclose the cistern and before 2nd fix commences, the system must firstly be tested for leaks Temporarily connect the btw pan in place and make connections. Turn the water supply on and flush the pan to check for leaks. This is vitally important prior to tiling in the case of fully tiled in installations.