


### **Desire Round Dual 1 Outlet Thermostatic Concealed Valve** Code: MLSHDEDU1ORD



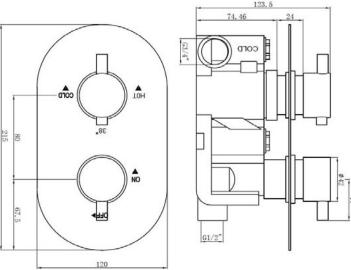

Construction Brass Body (CuZn38Pb18) Chrome plated to BS EN 248 **Finishes** 

**Product Type** Contemporary

Min. 0.2 bar, Max. 6.0 bar **Water Pressure** 

Suitable for all plumbing systems, preferably balanced.Min. **Plumbing Systems** 

supply pressure differential requirement is 5:1

Complies with BSEN 1111 **Standards** 

Cartridge Thermostatic

Inlet: 3/4" female thread **Fitting** 

Outlet: 1/2" female thread

10 years against manufacturing faults (3 Years on Serviceable Guarantee

Parts).

**Additional Information** 

1. Temperature: Pre-set 38°C, with push button override to 48°C.

2. Automatic shut off in the event of hot or cold water supply

failure.

#### Flow Rates (Litres per minute)


System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
		7.9	ı	12.6	20.0			36.0	ı	-









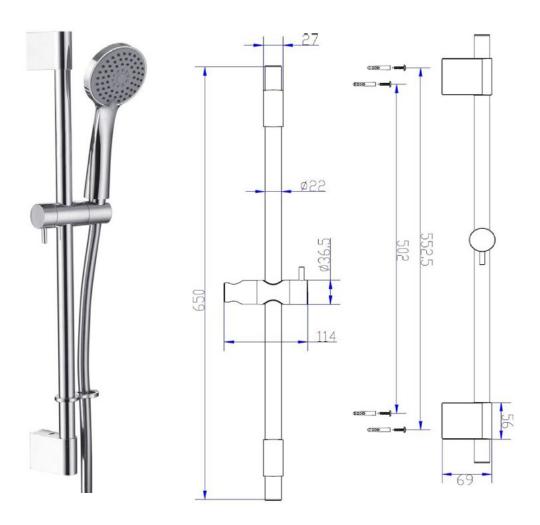

Construction Stainless steel & brass **Finishes** Chrome plated to BS EN 248 **Product Type** Contemporary

Guarantee

**Plumbing Systems** Suitable for all plumbing systems

10 years against manufacturing faults (3 Years on Serviceable

Parts).


**Additional Information** 1. Adjustable brass handset holder;


2. Chrome ABS Shower handset, and 1.5m PVC shower hose





# **Desire Round Wall Outlet** Code: MLSHDEWO1





Brass Body (CuZn40Pb18) Construction **Finishes** Chrome plated to BS EN 248

**Product Type** Contemporary

**Plumbing Systems** Suitable for all plumbing systems

G1/2" BSP **Fitting** 

10 years against manufacturing faults (3 Years on Serviceable Guarantee

Parts).








# **Desire Hose 2 - Premium Antibacterial PVC Hose 1.5m Code: MLSHDEHO2**

**EDPM** Construction **Finishes** Chrome **Product Type** Contemporary

**Plumbing Systems** Suitable for all plumbing systems Manufactured to comply with CE Certification

Cone to cone connection **Additional Information** 



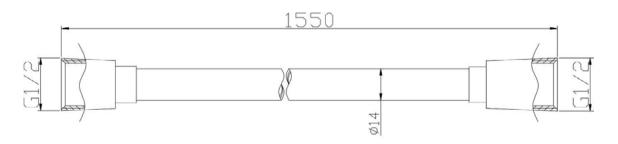





**Construction** ABS

Finishes Chrome Plated Product Type Contemporary

Water Pressure Min 1.0bar and Max 5.0bar
Plumbing Systems Suitable for all plumbing systems

Fitting G1/2"

**Guarantee** 10 years against manufacturing faults (3 Years on Serviceable

Parts)

#### Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	-	ı	ı	8.0	10.9	13.3	15.5	19.4	22.4	24.9



