


f 🞯 J in 🤊 🗗

CONSTRUCTION	Brass Body						
FINISHES	Chrome Plated						
PRODUCT TYPE	Contemporary						
WATER PRESSURE	Min. 0.5 Bar, Max . 6.0 Bar						
PLUMBING SYSTEMS	Suitable for all plumbing systems, preferably balanced. Min. supply pressure differential requirement is 5:1						
STANDARDS	Complies with BSEN 1111						
CERTIFICATION	WRAS & TMV2 Approved & Certified						
CARTRIDGE	On/Off - Zhonghao Fhermostatic - Wanhai						
FITTING	Easy Fit Kit						
ADDITIONAL INFO	Temperature Pre-set 38°C, with push button to override to 48°C Automatic shut off in the event of hot or cold water supply failure COOL Touch Bar Valve Technology Triple Function Handset 1.5m Stainless Steel Hose Check valve 0.5-0.10gpm						

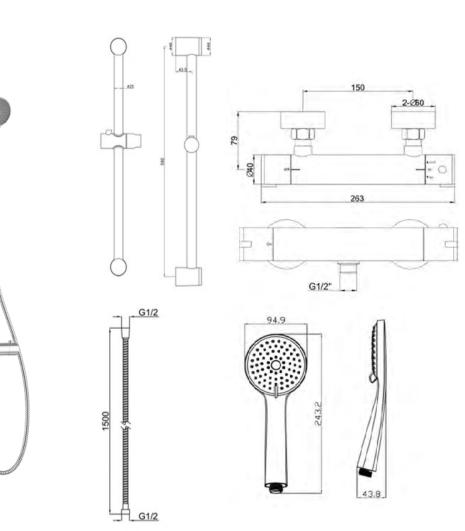

Flow Rates (Litres per minute)

SYSTEM	0.1	0.2	0.3	0.5	1.0	1.5	2.0	3.0	4.0	5.0
PRESSURE	Bar	Bar	Bar	Bar	Bar	Bar	Bar	Bar	Bar	Bar
	6.0	7.0	-	8.5	12.0	14.0	18.5	22.0	-	

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.