


Euri Exposed Thermostatic Shower

CONSTRUCTION	Valve: High Performance Polyamide (PPA) Body & Zinc-alloy Casing
FINISHES	Chrome Plated
PRODUCT TYPE	Contemporary
WATER PRESSURE	Min. 0.5 Bar, Max . 6.0 Bar
PLUMBING SYSTEMS	Suitable for all plumbing systems, preferably balanced. Min. supply pressure differential requirement is 5:1
STANDARDS	Complies with BSEN 1111
CERTIFICATION	WRAS & TMV2 Approved & Certified
CARTRIDGE	Vernet Cartridge
FITTING	Easy Fit Kit
ADDITIONAL INFO	Temperature Pre-set 38°C, with push button to override to 48°C Automatic shut off in the event of hot or cold water supply failure COOL Touch Bar Valve Technology Includes soap dish Triple Function Push Button Handset 1.5m Premium Antibacterial PVC Hose

Flow Rates (Litres per minute)

SYSTEM PRESSURE	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	4.5	6.5	8.1	10.6	15.2	-	-	-	-	-

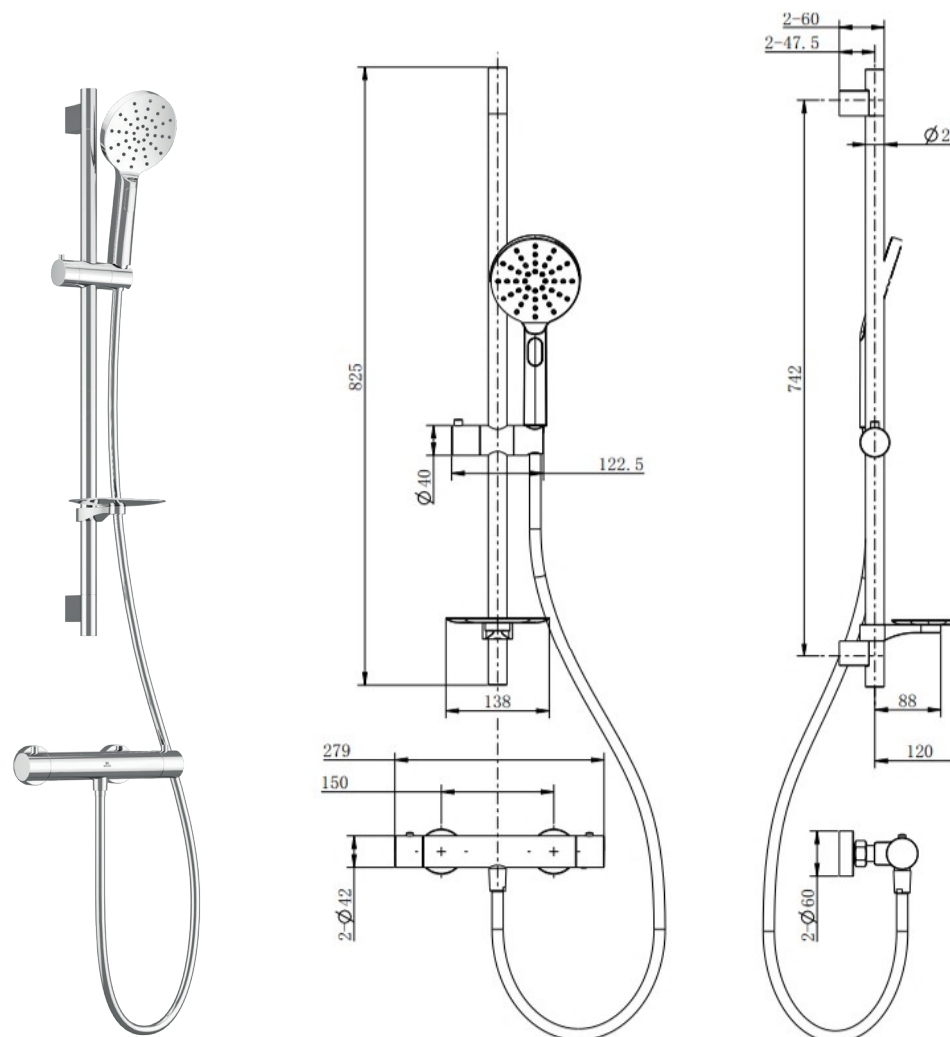

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.