
Dayla Exposed Thermostatic Shower - Black



CONSTRUCTION	Valve: High Performance Polyamide (PPA) Body & Zinc-alloy Casing; SS201 Stainless steel Riser rail & Base plates; Zinc-alloy Handles					
FINISHES	Matt Black Electro Plated Finish					
PRODUCT TYPE	Contemporary					
WATER PRESSURE	Min. 1.0 bar, Max. 6.0 bar					
PLUMBING SYSTEMS	Suitable for all plumbing systems, preferably balanced. Min. supply pressure differential requirement is 5:1					
STANDARDS	Complies with BSEN 1111					
CERTIFICATION	Manufactured to comply with WRAS & TMV2					
CARTRIDGE	On/Off Cartridge - Wanhai Thermostatic Cartridge - Wanhai					
FITTING	Easy Fit Kit Brass G1/2" BSP Male bottom outlet & G3/4" BSP Male upper outlet connection					
ADDITIONAL INFORMATION	Temprature Pre-set 38°C, with push button to override to 48°C Automatic shut off in the event of hot or cold water supply failure COOL Touch Bar Valve Technology 1.5m Premium Antibacterial PVC Hose Triple Function Push Button Handset					

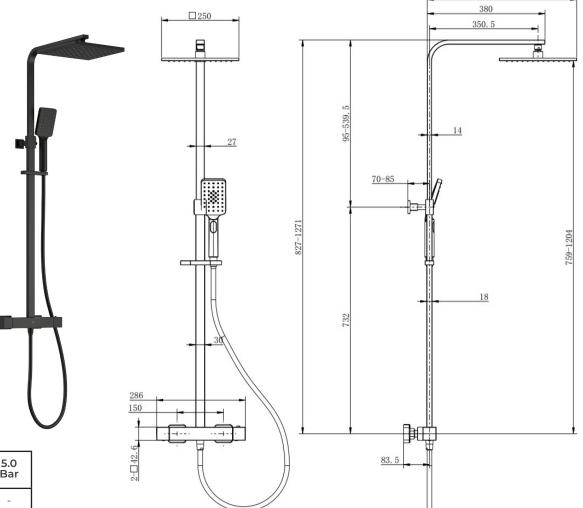

Flow Rates (Litres per minute)

SYSTEM	0.1	0.2	0.3	0.5	1.0	1.5	2.0	3.0	4.0	5.0
PRESSURE	Bar	Bar	Bar	Bar	Bar	Bar	Bar	Bar	Bar	Bar
	4.5	6.5	8.1	10.6	15.2	-	-	-	-	-

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.