


CONSTRUCTION	Brass Body					
FINISHES	Gun Metal PVD Finish					
PRODUCT TYPE	Contemporary					
WATER PRESSURE	Min. 0.2 Bar, Max. 6.0 Bar					
PLUMBING SYSTEMS	Suitable for all plumbing systems, Hot and Cold water pressure preferably balanced. Ma supply pressure differential requirement no greater than 5:1					
STANDARDS	Complies with BS 6920, BS EN 200					
CERTIFICATION	Manufactured to Comply with WRAS (approval pending)					
CARTRIDGE	Citec Cartridge					
AERATOR	Neoperl Aerator					
FITTING	Easy Fit Lock Nut					
FLEXI TAILS	Tucai WRAS					
WASTE	Universal Waste					
MORE INFO	Screw in Brass Base Ring 5mm					

Flow Rates (Litres per minute)

SYSTEM	0.1	0.2	0.3	0.5	1.0	1.5	2.0	3.0	4.0	5.0
PRESSURE	Bar	Bar	Bar	Bar	Bar	Bar	Bar	Bar	Bar	Bar
	1.98	2.9	3.24	4.10	5.72	-	8.07	9.81	11.31	

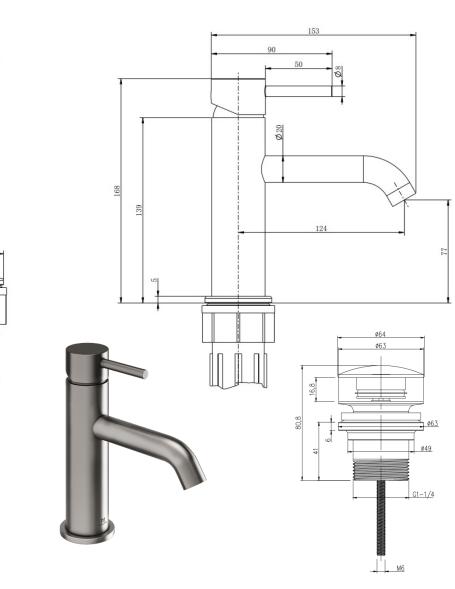

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.

ന

Ø40

050

f 🞯 J in 🤊 🗖